



## SYNCHRONOUS BELT H

Width Inches (")	0.37	0.50	0.75	1	1.5	2	3	4	6
------------------	------	------	------	---	-----	---	---	---	---

### Toothed Belt H

Pitch:	12,7 mm = 1/2"
Max. Width:	101,6 mm = 4"
Shore Hardness:	92° A
Material:	TPU
Cord:	Steel / Kevlar

### Standard Tolerances

Length:	±0,5 mm/m
Width:	±0,5 mm
Hight:	±0,25 mm

### Min. requirements

#### for pulleys and roller:


### No counterflexion

Min. Number of teeth:	14
Min. Diameter:	55,23 mm
Diameter tension roller:	60 mm


### With counterflexion

Min. Number of teeth:	20
Min. Diameter:	79,48 mm
Diameter tension roller:	80 mm





### Characteristics:

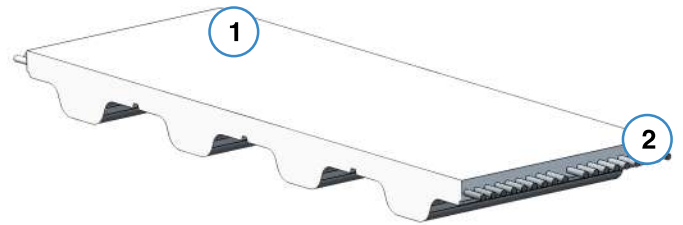

- 1.- Polyurethane
- 2.- Steel cords
- 3.- Tooth

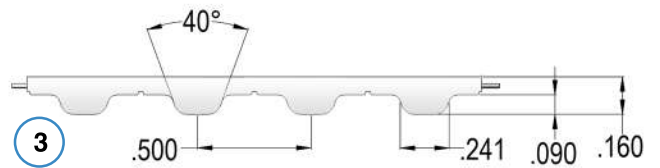

### Use:

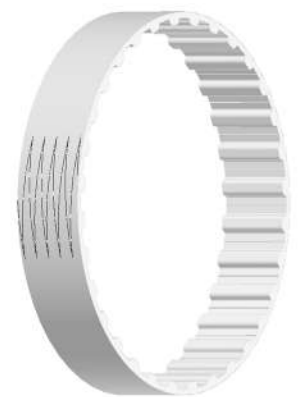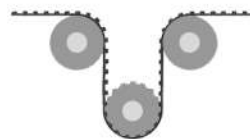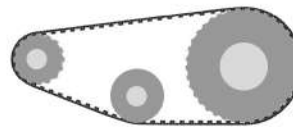

Available with  
Green Fabrics (PAZ, PAZ/PAR)