



## SYNCHRONOUS BELT T10

Width in Millimeters (mm)	10	12	16	25	32	50	75	100	150
---------------------------	----	----	----	----	----	----	----	-----	-----

### Toothed Belt AT20

Pitch:	20 mm
Max. Width:	150 mm
Shore Hardness:	92° A
Material:	TPU
Cord:	Steel / Kevlar

### Standard Tolerances

Length:	±0,8 mm/m
Width:	±1,0 mm
Height:	±0,4 mm

### Min. requirements for pulleys and roller:


#### No counterflexion

Min. Number of teeth:	18
Min. Diameter:	111,75 mm
Diameter tension roller:	120 mm


#### With counterflexion

Min. Number of teeth:	25
Min. Diameter:	156,32 mm
Diameter tension roller:	180 mm





### Characteristics:

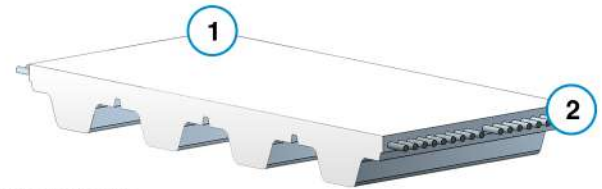

- 1.- Polyurethane
- 2.- Steel cords
- 3.- Tooth

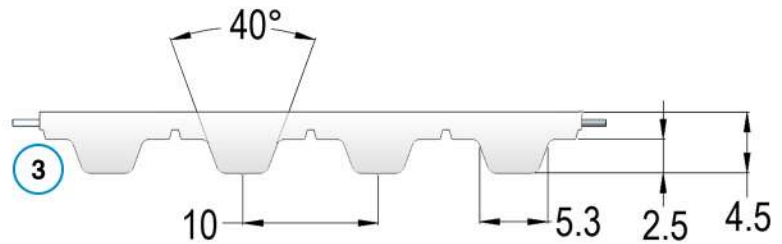

### Use:

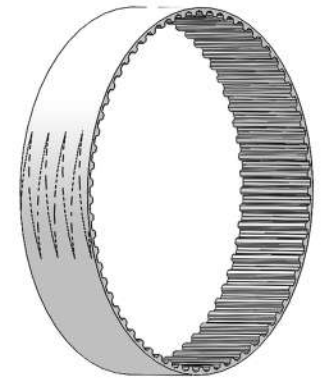

Available with Green Fabrics: (PAZ,PAZ/PAR)